

07/12/00

PI 9757.P01

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P19757

Total Pages

Inventor(s) or Application Identifier
Shinji HAMADA, Hiroshi INOUE, Akihiro TANIGUCHI,
Nobuyasu MORISHITA, Noriyuki FUJIOKA, Munehisa
IKOMA, and Yoshiaki OGATA

Title: BATTERY MODULE, AND RECHARGEABLE
BATTERY FOR CONSTITUTING THE BATTERY MODULE

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form
2. ☒ Specification [Total Pages 28]
(preferred arrangement set forth below)
- Descriptive title of the invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 8]
4. ☒ Oath or Declaration [Total Pages 5]
a. ☒ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 5 below]
1. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2)
and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
Status still proper and desired
15. ☐ The prior application is assigned of record to _____
16. ☐ Foreign priority claimed
a. ☐ Claim of Priority
b. ☐ Certified Copy of Priority Document(s)
17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.

19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a continuation-in-part, continuation, division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

GREENBLUM & BERNSTEIN, P.L.C.

1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

7/12/00

Leslie Nepperman Key No. 33,329
Signature

Bruce H. Bernstein, Reg No. 29,027

Typed or Printed Name

BATTERY MODULE, AND RECHARGEABLE BATTERY
FOR CONSTITUTING THE BATTERY MODULE

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a battery module, and in particular to a rechargeable battery for constituting the battery module in which the internal battery resistance can be made small and the battery output can be increased.

10

2. Description of Related Art

Fig. 10 shows a conventional battery module made by connecting a plurality of rechargeable batteries and coupling them together as one so as to obtain the necessary power. In this battery module, a plurality of cells 41 (41a to 41j) made of sealed alkaline rechargeable batteries as shown in Fig. 11 are arranged side by side, with the long lateral walls of the battery cases 42 adjacent each other. End plates 52 are arranged against the outside of the cells 41a and 41j at both ends, and the two end plates 52 and 52 are bound together with binding bands 53 so as to couple the cells together as one piece.

20

For the cells 41, an electrode plate group 47, comprising positive electrode plates and negative electrode plates layered

with intervening separators, thus constituting elements for electromotive force, is accommodated in a battery case 42 together with a liquid electrolyte, and the open end of the battery case 42 is closed with a lid 46 provided with a safety

5 vent 45. From the upper end at one side of the positive electrode plates forming the electrode plate group 47, leads 49 extend upward and are connected to a positive electrode terminal 43 above them, and similarly, from the upper end of the other side of the negative electrode plates, leads 49
10 extend upward and are connected to a negative electrode terminal 44 above them. The positive electrode terminal 43 and the negative electrode terminal 44 are attached to the lid 46.

The positive electrode terminals 43 and negative electrode terminals 44 of coupled neighboring cells 41 are connected by
15 connection plates 51, thereby connecting all cells 41 in series. When the battery cases 42 are coupled, ribs 48, which protrude vertically from the long lateral walls of the battery cases 42, are abutted against each other, forming coolant passages running in the vertical direction along the long
20 lateral walls of the battery cases 42 in the space between ribs 48. The cells 41a to 41j are cooled by flowing air through these coolant passages.

However, with the configuration for the cells 41 of this conventional battery module, leads 49 extend from a portion at

002170" 6941980 0664769 071200

the upper end on one side of the electrodes and are connected to the electrode terminals 43 and 44, and consequently, there were the problems that the internal resistance of the battery was large, because the average distance from the surface of the electrodes to the collector portions of the leads 49 was long, and that the power output was low, because the utilization rate of the electrode active material was low.

Moreover, because the terminals 43 and 44 protruding to the outside of the lid 46 are connected by connection plates 51, it is necessary to provide space for this connection at the upper end of the battery cases 42. Furthermore, since the connection portions are exposed, there is the problem that the space for installing this battery module cannot be made compact.

Moreover, in the portions where electrode pillars of the electrode terminals 43 and 44 extend through the lid 46, O-rings for providing a seal are usually placed only on the inner side of the lid 46, and there was the danger that electrolyte may leak during use of the battery.

SUMMARY OF THE INVENTION

In view of these problems of the prior art, it is an object of the present invention to provide a rechargeable battery, of which internal battery resistance is small and of

which battery output can be improved. A further object of the present invention is to provide a battery module, of which installation space can be made, and in which there is no danger of electrolyte leakage.

5 To achieve the above object, the present invention provides a rechargeable battery, comprising:

a prismatic cell case having short lateral walls and long lateral walls; and

10 a group of electrodes accommodated inside the cell case, the group of electrodes including a plurality of positive and negative electrode plates arranged alternately and substantially in parallel to the long lateral walls of the cell case with an intervening separator therebetween;

15 wherein lateral edges of the positive electrode plates protrude beyond the negative electrode plates on one side, and lateral edges of the negative electrode plates protrude beyond the group of positive electrode plates on the opposite side, the protruding portions forming lead portions.

20 Since the lateral portions on one side of the electrode plates serve as lead portions, the average distance from the surfaces of the electrode plates to the collector portions can be made short, the internal battery resistance can be made small, and the utilization rate of the electrode active

material becomes large, whereby the power output of the battery can be increased.

The lateral edge portions of the negative electrode plate and positive electrode plate lead portions of the group of electrodes are attached to respective collector plates, and the group of electrodes is thus held by the collector plates. Therefore, the group of electrodes can be held with a compact configuration, and the surface area of the regions for generating an electromotive force can be made large, whereby the battery capacity can be increased.

The collector plates are provided with curved portions at both ends thereof for clamping the group of electrodes. Thereby, the electrodes do not spread and extend toward the outside of the collector plates when the group of electrodes are attached to the collector plates, and the electrodes can be fixed reliably to the collector plates.

By setting $D < L \leq 4D$, where L is the length of a side of the lead portions of the electrodes and D is the length of a side in a direction perpendicular thereto, the average distance from the surfaces of the electrode plates to the collector portions can be made even shorter, and the above-noted effects can be enhanced. If $D \geq L$, the ratio of the space for connecting the cells, that is formed between the upper edge of the electrode plate group and the upper wall of the cell case,

against the volume of the electrode plate groups becomes large. As the proportion of the dead space increases, the battery capacity is compromised accordingly, but this problem can be solved when L and D are set as noted above. On the other hand, if $L > 4D$, the aspect ratio (vertical / horizontal) becomes too large, which leads to problems with regard to other structural conditions, such as maintaining the strength of the collector plates or manufacturing of the cell cases. Moreover, if $L > 4D$, there is the problem that temperature variations are large between the two ends of the electrode plate groups in the flow direction of the coolant when the outer walls of the cell case are cooled by letting a coolant flow in the longitudinal direction along the lead portions of the electrode plate groups, but this problem does not occur when L and D are set as noted above.

In the cell case in which a group of electrodes is accommodated, which is made of electrode plates whose dimensions are set to $D < L \leq 4D$ as noted above, by setting $d < l \leq 4d$, where l is the length of the long lateral walls of the cell case in the direction parallel to the lead portions of the electrodes, and d is the width of the long lateral walls in the direction perpendicular thereto, the proportion of the dead space is optimized and the battery capacity is increased. Moreover, the temperature variations between the upper portion

and the lower portion of the electrode plates can be reduced, when the cell case is cooled by letting the coolant flow in the vertical direction of the long lateral walls of the cell cases.

As mentioned above, the lateral edge portions of the group of positive electrode plates protrude beyond the group of negative electrode plates on one side, and the lateral edge portions of the group of negative electrode plates protrude beyond the group of positive electrode plates on the opposite side form the lead portions. Therefore, a single, belt-like separator can be arranged in a zigzag fashion between the positive electrode plates and the negative electrode plates. In this way, the separator can be arranged easier between the electrode plates than by covering the electrode plates with bag-shaped separators.

The rechargeable battery according to the present invention can be constructed such that:

a plurality of cell cases are coupled together as one piece with the short lateral walls of the cell cases being mutually integrated, thereby constituting an integral battery case;

upper open ends of the cell cases are closed by an integral lid member; and

the collector plates in adjacent cell cases are connected to each other via a connection fitting that extends through the short lateral walls between the adjacent cell cases.

Thereby, the neighboring cells can be connected to each other inside the integral battery case, and the space for setting up the rechargeable battery can be made compact.

Furthermore, through holes are formed in the short lateral walls between two adjacent cell cases at an edge portion; and the connection fitting comprises a pair of frame fittings, each frame fitting having a base end and a protruding portion that is inserted into the through holes, the distal ends of the protruding portions being welded together, and the collector plates being attached to the base ends of the frame fittings. Thereby, the collector plates can be connected easily by welding with a pair of frame fittings.

According to the present invention, a battery module can be constituted by coupling a plurality of rechargeable batteries together, each of the rechargeable batteries accommodating therein a group of electrodes and a liquid electrolyte, wherein:

a plurality of prismatic cell cases having short lateral walls and long lateral walls are arranged side by side, with adjacent short lateral walls being integral with each other;

the group of electrodes inside a cell case including a positive electrode collector plate and a negative electrode collector plate arranged at lateral opposite ends of the cell case in the direction of the long lateral walls thereof;

5 through holes are formed in the short lateral walls of the cell cases at upper edge portions thereof;

 a pair of frame fittings comprising base ends and protruding portions are provided for each of the cell cases for connecting two adjacent cell cases, the protruding portions of
10 the pair of frame fittings being inserted into the through holes formed in the upper edge portions of the short lateral walls of the cell cases from both sides and welded together, and the positive and negative electrode collector plates in the cell cases being respectively attached to the base ends of the
15 frame fittings;

 end frame fittings having base ends and protruding portions are provided for cell cases located at both outer ends of the rechargeable battery for connecting the cell cases at both outer ends of the rechargeable battery to outside
20 terminals; and

 connection terminals having protruding portions are connected to the end frame fittings of the cell cases at both outer ends of the rechargeable battery.

Thereby, the connection between the cell cases and the outside of the cell cases can be carried out easily with a compact configuration.

Moreover, a sealing material is provided around the protruding portions of the frame fittings and the connection terminals, so as to provide a seal between the two adjacent cell cases, whereby both sides of the connection configuration can be sealed double, and leakage of liquid electrolyte during use of the battery can be prevented.

While novel features of the invention are set forth in the preceding, the invention, both as to organization and content, can be further understood and appreciated, along with other objects and features thereof, from the following detailed description and examples when taken in conjunction with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an external perspective view of a battery module according to one embodiment of the present invention;

Fig. 2 is a partial vertical lateral cross-sectional view of the same;

Fig. 3 is a cross-sectional view taken in the direction of the arrows along the line III - III in Fig. 2;

Fig. 4 is a front view of an electrode plate group of the

002170.6974160

same embodiment;

Fig. 5 is a cross-sectional view taken in the direction of the arrows along the line V - V in Fig. 4;

Fig. 6A is a front view, Fig. 6B is a top plan view, and
5 Fig. 6C is an enlargement of VIC in Fig. 6B, showing the positive electrode plate in the same embodiment;

Fig. 7A is a front view, Fig. 7B is a top plan view, and Fig. 7C is an enlargement of VIC in Fig. 7B, showing the negative electrode plate in the same embodiment;

10 Fig. 8 is a vertical cross-sectional view showing the configuration of a portion connecting two cells in the same embodiment;

Fig. 9 is an exploded perspective view of an electrode plate group in another embodiment of the present invention;

15 Fig. 10 is an external perspective view of a conventional battery module; and

Fig. 11 is a partially cutaway perspective view of a cell of the same conventional example.

20

DESCRIPTION OF PREFERRED EMBODIMENTS

Preferred embodiments of a battery module according to the present invention will be hereinafter described with reference to Figs. 1 to 8.

The battery module of this embodiment is a nickel metal hydride battery, which is suitable for use as a drive power source for an electric vehicle. As shown in Figs. 1 to 3, the battery module 1 is made up of a plurality of (six in the example shown in the drawing) cells 6, arranged in a row. Cell cases 3 of each of the cells 6, which are formed in a prismatic fashion with short lateral walls, long lateral walls, and open top ends, are mutually integrated on their short lateral walls, thereby constituting an integral battery case 2. The upper open ends of the cell cases 3 are closed all together by an integral lid member 4.

Each of the battery cases 3 constitutes a cell 6, accommodating therein electrode plate groups 5 together with electrolyte. An electrode plate group 5 comprises a large number of positive electrode plates and negative electrode plates arranged parallel to the long lateral walls of the cell cases 3 and layered in the direction of the short lateral walls of the cell cases 3, with intervening separators therebetween. The construction inside the battery case will be described later in more detail.

Connection holes 7 are formed at the upper edge portions of the outer short lateral walls of the cell cases 3 at the two ends of the integral battery case 2 and between each two cell cases 3. Positive and negative connection terminals 8 are

respectively mounted to the connection holes 7 at the outer short lateral walls of the two outer cell cases 3, and connection fittings 9 for serially connecting two adjacent cells 6 are mounted to the connection holes 7 in the

- 5 intermediate short lateral walls between each two cell cases 3. In addition, the lid member 4 is provided with one safety vent 10 for each of the cell case 3, so as to release pressure when the internal pressure in the cell cases 3 has exceeded a certain value. Moreover, a sensor mounting hole 11 for mounting a temperature detection sensor for detecting the temperature of the cells 6 is formed at suitable cells 6 or for each cell 6.

- The long lateral walls of six cells 6 together form an integral side wall 12 of the integral battery case 2. On this side wall 12 of the integral battery case 2, protruding ribs 13 that extend vertically are provided at positions corresponding to the lateral edges of two adjacent cell cases 3. Further, a large number of relatively small circular protrusions 14 are formed at suitable intervals in matrix fashion between each two ribs 13. The ribs 13 and the protrusions 14 have the same height. Furthermore, coupling ribs 15a and 15b having the same height as the ribs 13 and the protrusions 14 are formed on the side walls of the upper edge of the cell cases 3 and the side walls of the lid member 4, such as to bridge across the side

walls of the cell cases 3 and the lid member 4, at positions corresponding to an extension of the ribs 13 and the protrusions 14. A plurality of protrusions 16 and indentations 17, for positioning and fitting together integral battery cases 2 when their side walls 12 are abutted on each other, are arranged at an upper portion and a lower portion of the outer surface of the two ribs 13 near both ends of the side wall 12 of the integral battery case 2. When a plurality of integral battery cases 2 are arranged in a row in parallel to constitute a battery module, the ribs 13, the protrusions 14 and the coupling ribs 15a and 15b form coolant passages for cooling the cell cases 3 effectively and uniformly.

The aforementioned electrode plate groups 5 are explained in detail with reference to Figs. 4 to 7. In Figs. 4 and 5, a plurality of positive electrode plates 18 and negative electrode plates 19 are arranged alternately, and the positive electrode plates 18 are covered with separators 20 in the form of a bag having an opening on one side. The positive plates 18 and the negative plates 19 are stacked upon one another with separators 20 therebetween, thereby constituting the electrode plate group 5. In Fig. 4, the region where the positive electrode plates 18 and the negative electrode plates 19 oppose each other with the intervening separators 20 and generate electric power is indicated by oblique lines. The lateral

edges of the group of positive electrode plates 18 protrude beyond the group of negative electrode plates 19 on one side, and the lateral edges of the group of negative electrode plates 19 protrude beyond the group of positive electrode plates 18 on the opposite side, and these protruding lateral portions form the lead portions 18a and 19a, to the lateral ends of which collector plates 21 and 22 are welded, respectively. The outer edges of the collector plates 21 and 22 are bent toward the inside as shown in Fig. 5, in order to restrict the dimensions of the electrode plates 18, 19 during the collector plates 21, 22 are welded to the electrode plates 18, 19, so that the electrode plates 18, 19 do not spread outwards as pressure is applied thereto. Numeral 23 denotes external separators arranged at the outer faces of the electrode plate group 5 between the collector plates 21 and 22.

The positive electrode plates 18 are made of Ni foamed metal. As shown in Figs. 6A-6C, the lead portion 18a is constructed by compressing one lateral edge of the plate of foamed metal and attaching a lead plate 24 on one surface of the lead portion 18a by ultrasonic welding or seam welding. The negative electrode plates 19 shown in Fig. 7 are made of Ni punched metal coated with an active material except for lead portions 19a. "L" denotes the length of a side of the positive electrode plate 18 and the negative electrode plate 19 where

the lead portions 18a and 19a are provided, and "D" denotes the length of the side in a direction perpendicular thereto. The positive and negative electrode plates 18, 19 are configured so that "L" is larger than "D", but not larger than four times

5 "D".

Numeral 29 denotes pairs of positioning holes formed in the lead portions 18a and 19a at a suitable distance from the top and the bottom thereof. By inserting positioning pins into these positioning holes 29 and by applying pressure on the lateral ends of the lead portions 18a and 19a, these lateral ends of the lead portions 18a and 19a are aligned and welded reliably and evenly to the collector plates 21 and 22.

Fig. 8 shows the connection fitting 9 for serially connecting the cells 6. The connection fitting 9 comprises a pair of frame fittings 25, to the base ends of which the upper ends of the collector plates 21 and 22 of two neighboring cells 6 are welded, respectively. The cells 6 are connected by inserting from both sides protruding portions 26 projecting from an axial portion of the frame fittings 25 into the connection hole 7 formed in the short lateral walls of the cell cases 3, and abutting their leading faces against each other and welding them together. The bonding of the upper ends of the collector plates 21 and 22 to the base ends of the frame fittings 25 and the welding of the leading faces of the

protruding portions 26 are performed by resistance welding all together after they have been assembled. Annular grooves 27 are formed around the protruding portions 26 of the frame fittings 25, and the connection hole 7 is sealed double with O-rings 28 mounted in these annular grooves 27.

In the battery module 1 of the present invention, as described above, the integral battery case 2 is constituted by mutually connecting a plurality of prismatic cell cases 3, abutted on their short side walls. The open ends of the cell cases 3 are closed by the integrated lid member 4, and the collector plates 21, 22 of the electrode plate groups 5 in adjacent cells 6 are connected via the connection fittings 9, that pass through the connection holes 7 formed in the upper edges of the short side walls of each cell case 3. Therefore, neighboring cells 6 can be connected inside the integral battery case 2. Since the connection configuration is not exposed to the outside, the installation space for the battery module 1 can be made compact.

The connection fittings 9 are made of pairs of frame fittings 25 having protruding portions 26, which are inserted into the connection holes 7 from both sides and whose leading ends are welded together, and to whose base ends the collector plates 21 and 22 are attached, so that the electrode plate groups 5, i.e., the cells 6 of neighboring cell cases 3 can

easily be connected in series by welding the frame fittings 25. Also, by arranging connection terminals 8 having similar protruding portions 26 and frame fittings 25 on the outer short lateral walls of the two cell cases 3 at opposite ends and by
5 welding the leading ends of their protruding portions 26, 26 together, the connection of the cell cases 3 on either end with an external terminal can be performed with a compact configuration and in a simple manner.

Moreover, thanks to the O-rings 28 for sealing the cell
10 cases 3 provided around the protruding portions 26 of the frame fittings 25 and the connection terminals 8, both sides of the short lateral walls of adjacent cell cases 3 are sealed double and leakage of liquid during use can be prevented reliably.

In the electrode plate groups 5 of the cells 6, the
15 lateral edge portions of the group of positive electrode plates 18 protrude beyond the group of negative electrode plates 19 on one side, and the lateral edge portions of the group of negative electrode plates 19 protrude beyond the group of positive electrode plates 18 on the opposite side, and these
20 protruding lateral portions form the lead portions 18a and 19a, to which collector plates 21 and 22 are welded over their entire length. Therefore, the average distance from the surfaces of the electrodes 18 and 19 to the collector plates 21 and 22 can be made short, and as a result, the internal battery

resistance can be made small and the utilization rate of the electrode active material becomes large, which increases the battery output. In Fig. 4, the collector plates 21 and 22 are attached to the lead portions 18a and 19a over their entire length, but substantially the same effect can be attained if the collector plates 21 and 22 are attached to the lead portions 18a and 19a over at least half the length of the lead portions 18a and 19a.

Moreover, the groups of electrode plates 18 and 19 are held in a simple construction by attaching the lateral edge portions of the lead portions 18a and 19a of the electrode plates 18 and 19 to the collector plates 21 and 22, whereby the surface area of the regions for generating an electromotive force becomes large, and the battery capacity can be increased.

The length L of a side of the electrode plates 18, 19 where the lead portions 18a, 19a are provided, and the length D of the side orthogonal to L are set $D < L \leq 4D$, so that the average distance from the entire surfaces of the electrode plates to the collector plates can be made even shorter. If $D \geq L$, the ratio of the space for connecting the cells 6, that is formed between the upper ends of the electrode plate groups 5 and the upper wall of the lid member 4 (dead space), against the volume of the electrode plate groups 5 (space where electromotive force is generated) becomes large. As the dead

space increases, the battery capacity is compromised accordingly, but this problem can be solved with the above-described configuration.

On the other hand, if $L > 4D$, the aspect ratio (vertical / horizontal) becomes too large, which leads to the problem with regard to other structural conditions, such as maintaining the strength of the collector plates 21 and 22 or manufacture of the cell cases 3. Furthermore, if $L > 4D$, large temperature variations would occur between the lower end and the upper end of the electrode plate groups 5, when a plurality of integral battery cases 2 are arranged side by side and their outer walls are cooled by flowing a coolant in the vertical direction perpendicular to the direction in which the cell cases 3 are arranged, that is, in the longitudinal direction along the lead portions of the electrode plate groups 5. Such problem can be prevented by setting "L" and "D" are set as described above.

Moreover, if the length l of the long lateral walls of cell cases 3 parallel to the lead portions 18a, 19a of the electrode plates 18, 19 and the length d of the short lateral walls of the cell cases 3 as indicated in Fig. 2 are set $d < l \leq 4d$, the proportion of the above mentioned dead space can be optimized and the battery capacity can be increased. Also, the temperature variation between the upper end and the lower end of the electrode plates can be reduced, when the cell cases 3

are cooled by letting the coolant flow in the vertical direction of the long lateral walls of the cell cases 3.

Next, another embodiment of a rechargeable battery in accordance with the present invention will be described with

5 reference to the Fig. 9. In the aforementioned embodiment, the positive electrode plates 18 are covered by bag-shaped separators 20, so that the separators 20 are provided between the positive electrode plates 18 and the negative electrode plates 19. Since the lateral edge portions of the group of
10 positive electrode plates 18 protrude beyond the group of negative electrode plates 19 on one side, and the lateral edge portions of the group of negative electrode plates 19 protrude beyond the group of positive electrode plates 18 on the opposite side, and these protruding lateral edge portions form
15 the lead portions 18a and 19a, the separator can be arranged in a zigzag fashion between the positive electrode plates 18 and the negative electrode plates 19 as shown in Fig. 9. This embodiment employs such meandering arrangement of the separator 30. In this way, the separator can be arranged easier between
20 the electrode plates 18 and 19 than by covering each of the electrode plates with the bag-shaped separators 20.

As has been explained above, in the rechargeable battery in accordance with the present invention, the lateral edge portions of the group of positive electrode plates protrude

beyond the group of negative electrode plates on one side, and the lateral edge portions of the group of negative electrode plates protrude beyond the group of positive electrode plates on the opposite side, and these protruding lateral edge portions form the lead portions. Thus one lateral edge of each electrode plate serves as a lead portion, and thereby the average distance from the surfaces of the electrodes to the collector portions can be made short. Accordingly, the internal battery resistance can be made small and the utilization rate of the electrode active material becomes large, whereby the power output of the battery is increased.

Although the present invention has been fully described in connection with the preferred embodiment thereof, it is to be noted that various changes and modifications apparent to those skilled in the art are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

CLAIMS

WHAT IS CLAIMED IS:

1. A rechargeable battery, comprising:

a prismatic cell case having short lateral walls and long
5 lateral walls; and
a group of electrodes accommodated inside the cell case,
the group of electrodes including a plurality of positive and
negative electrode plates arranged alternately and
substantially in parallel to the long lateral walls of the cell
10 case with an intervening separator therebetween;

wherein lateral edges of the positive electrode plates
protrude beyond the negative electrode plates on one side, and
lateral edges of the negative electrode plates protrude beyond
the group of positive electrode plates on the opposite side,
15 the protruding portions forming lead portions.

2. The rechargeable battery of Claim 1, further
comprising collector plates, wherein the lateral edges of
respective lead portions of the positive electrode plates and
the negative electrode plates are attached to the collector
20 plates, whereby the group of electrodes is held by the
collector plates.

3. The rechargeable battery of Claim 2, wherein the
collector plates are provided with curved portions at both ends
thereof for clamping the group of electrodes.

4. The rechargeable battery of Claim 2, wherein:

a plurality of cell cases are coupled together as one piece with the short lateral walls of the cell cases being mutually integrated, thereby constituting an integral battery

5 case;

upper open ends of the cell cases are closed by an integral lid member; and

the collector plates in adjacent cell cases are connected to each other via a connection fitting that extends through the
10 short lateral walls between the adjacent cell cases.

5. The rechargeable battery of Claim 4, wherein the collector plates are connected at an upper edge thereof to another group of electrodes or to an outer terminal.

6. The rechargeable battery of Claim 4, wherein
15 through holes are formed in the short lateral walls between two adjacent cell cases; and

the connection fitting comprises a pair of frame fittings, each frame fitting having a base end and a protruding portion that is inserted into the through holes, the distal ends of the
20 protruding portions being welded together, and the collector plates being attached to the base ends of the frame fittings.

7. The rechargeable battery of Claim 1, wherein $D < L \leq 4D$, where L is the length of a side of the positive and negative electrode plates where the lead portions are provided,

and D is the length of a side of the positive and negative electrode plates in a direction perpendicular thereto.

8. The rechargeable battery of Claim 1, wherein $d < l \leq 4d$, where l is the length of the long lateral walls of the cell case in the direction parallel to the lead portions of the positive and negative electrode plates, and d is the length of the short lateral walls of the cell case in the direction perpendicular thereto.

9. The rechargeable battery of Claim 1, wherein the separator is of a belt-like shape and meanders alternately between the positive electrode plates and the negative electrode plates.

10. A battery module constituted by coupling a plurality of rechargeable batteries together, each of the rechargeable batteries accommodating therein a group of electrodes comprising a group of positive electrode plates and a group of negative electrode plates and a liquid electrolyte, wherein:

a plurality of prismatic cell cases having short lateral walls and long lateral walls are arranged side by side, with adjacent short lateral walls being integral with each other, and upper open ends of the plurality of prismatic cell cases being integrally closed with a single lid member;

the group of electrodes inside a cell case including a positive electrode collector plate and a negative electrode

03614769.071200

collector plate arranged at lateral opposite ends of each of the group of positive electrode plates and the group of negative electrode plates respectively;

through holes are formed in the short lateral walls of the
5 cell cases at upper edge portions thereof;

a pair of frame fittings comprising base ends and protruding portions are provided for each of the cell cases for connecting two adjacent cell cases, the protruding portions of the pair of frame fittings being inserted into the through
10 holes formed in the upper edge portions of the short lateral walls of the cell cases from both sides and welded together, and the positive and negative electrode collector plates in the cell cases being respectively attached to the base ends of the frame fittings;

15 end frame fittings having base ends and protruding portions are provided for cell cases located at both outer ends of the rechargeable battery for connecting the cell cases at both outer ends of the rechargeable battery to outside terminals; and

20 connection terminals having protruding portions are connected to the end frame fittings of the cell cases at both outer ends of the rechargeable battery.

11. The battery module of Claim 10, further comprising a sealing material that is provided around the protruding

portions of the frame fittings and the connection terminals, so as to provide a seal between the two adjacent cell cases.

002120.69241960

ABSTRACT OF THE DISCLOSURE

In each of the cells that constitute an battery module, a plurality of positive electrode plates and negative electrode plates are layered parallel to the long lateral walls of prismatic cell cases with intervening separators therebetween, wherein lateral edge portions of the positive electrode plates protrude beyond the negative electrode plates on one side, and lateral edge portions of the negative electrode plates protrude beyond the group of positive electrode plates on the opposite side, the protruding portions forming lead portions.

Fig. 1

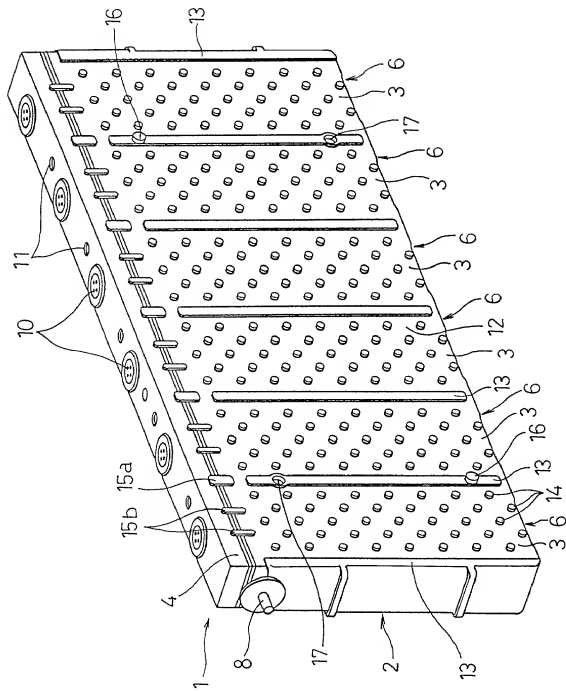


Fig. 2

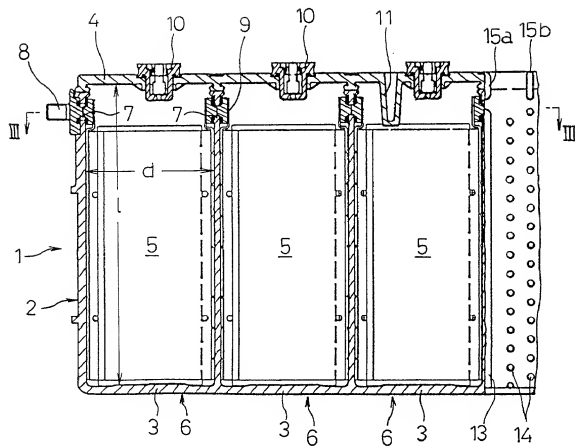


Fig. 3

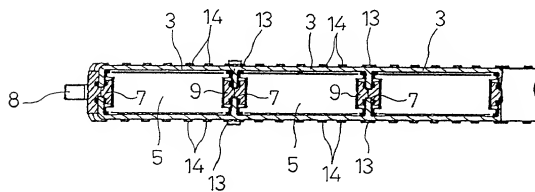


Fig. 4

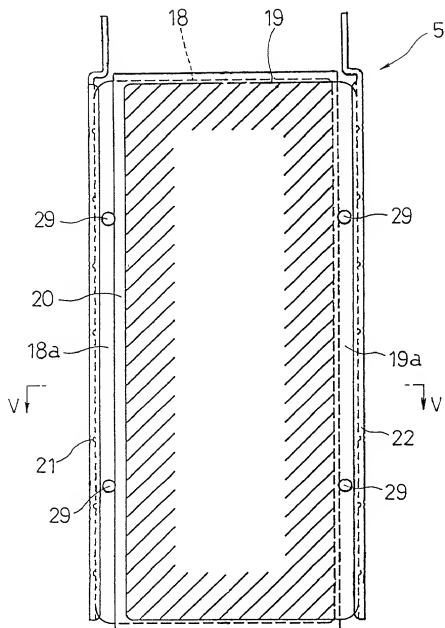
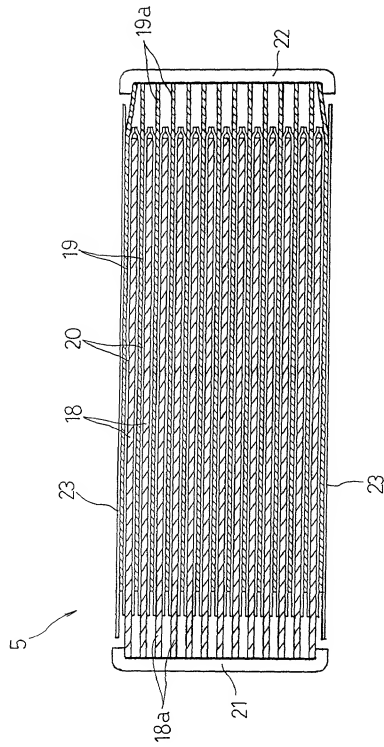


Fig. 5






Fig. 6C




Fig. 6A

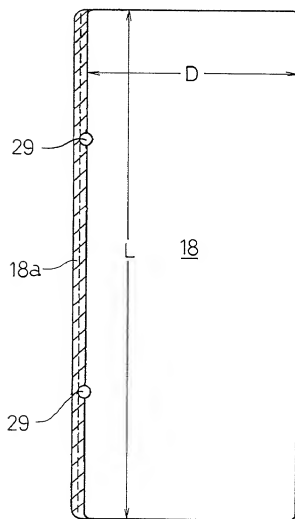



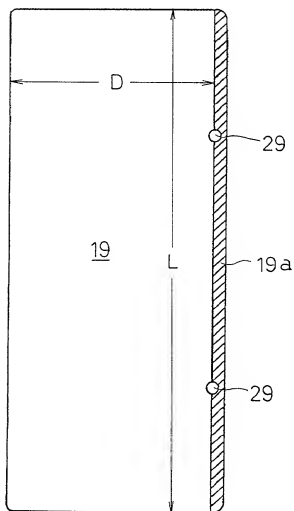

Fig. 7B*Fig. 7A**Fig. 7C*

Fig. 8




Fig. 9

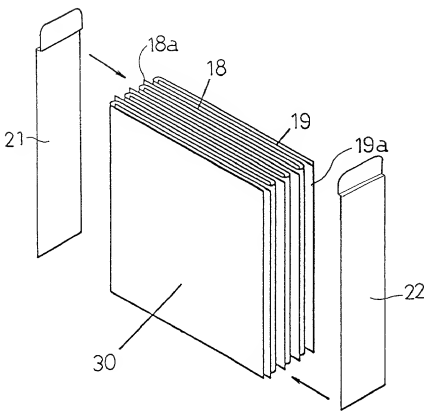


Fig. 10
Prior Art

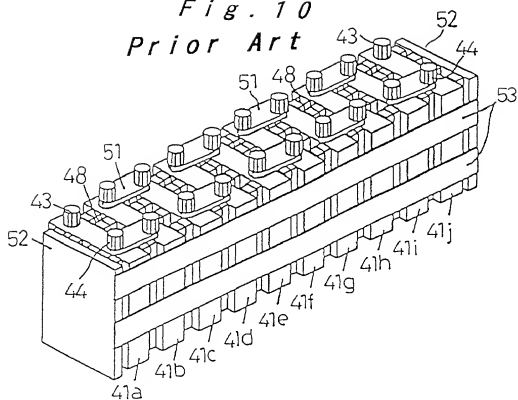
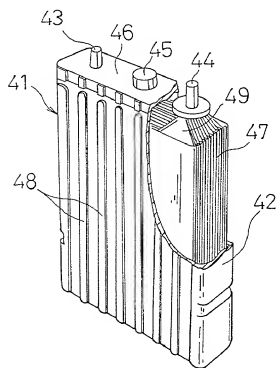


Fig. 11
Prior Art



Declaration and Power of Attorney For Utility or Design Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり
宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおり
であり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、
最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている
場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が
下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.

I believe I am the original, first and sole inventor (if only one name is
listed below) or an original, first and joint inventor (if plural names
are listed below) of the subject matter which is claimed and for
which a patent is sought on the invention entitled

"Battery Module, and Rechargeable
Battery for Constituting the Battery
Module"

the specification of which is attached hereto unless the following
box is checked:

☐ was filed on _____ as
United States Application Number _____
and was amended on _____, (if applicable) or,

PCT International Application Number _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents
of the above identified specification, including the claims, as
amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
§1.56.

I hereby claim foreign priority under Title 35, United States Code
§119(a-d) or §365(b) of any foreign application(s) for patent or
inventor's certificate, or §365(a) of any PCT international application
which designated at least one country other than the United States,
listed below. I have also identified below, by checking the "No"
box, any foreign application for patent or inventor's certificate, or of
any PCT international application having a filing date before that of
the application on which priority is claimed:

Priority claimed

優先権の主張

☒ Yes ☐ No

☒ Yes ☐ No

☒ Yes ☐ No

☒ Yes ☐ No

☒ Yes ☐ No

☒ Yes ☐ No

Priority foreign applications

先々の外国出願

11-207518

(Number)

(番号)

2000-98002

(Number)

(番号)

Japan

(Country)

(国名)

Japan

(Country)

(国名)

22/07/1999

(Day/Month/Year Filed)

(出願の年月日)

31/03/2000

(Day/Month/Year Filed)

(出願の年月日)

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a
supplemental priority sheet attached hereto.

Japanese Language Utility or Design Patent Application Declaration

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Day/Month/Year Filed) 出願の年月日
(Application No.) (出願番号)	(Day/Month/Year Filed) 出願の年月日
(Application No.) (出願番号)	(Day/Month/Year Filed) 出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄に記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の範囲で、先の合衆国特許出願又はPCT国際出願に開示されていない限り、先に、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中 放棄済み)

(Status)
(patented, pending, abandoned)

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中 放棄済み)

(Status)
(patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄に記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の知る情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に關し特許商標庁にて取られるいかなる行為に關して、同米国弁護士又は代理人に、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum
Bruce H. Bernstein
James L. Rowland
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Reg. No. 28,394
Reg. No. 29,027
Reg. No. 32,674
Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**
1941 ROLAND CLARKE PLACE
RESTON, VA 20191

直接電話連絡先: (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.
(703) 716-1191

唯一のまたは第一の発明者の氏名	Full name of sole or first inventor Shinji Hamada
同発明者の署名	Inventor's signature <i>Shinji Hamada</i>
住所	Residence 52-1-101, Yamada 2-ban-cho, Toyohashi-shi, Aichi 440-8104 JAPAN
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN
第2の共同発明者の氏名 (該当する場合)	Full name of second joint inventor, if any Hiroshi Inoue
同第2共同発明者の署名	Second inventor's signature <i>Hiroshi Inoue</i>
住所	Residence 1-15-1-201, Higashiodakano, Toyohashi-shi, Aichi 440-0012 JAPAN
国籍	Citizenship Japan
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Utility or Design Patent Application Declaration

第三の共同発明者の氏名		Full name of third inventor, if any Akihiro Taniguchi	
共同発明者の署名	日付	Third inventor's signature <i>Akihiro Taniguchi</i>	Date 13/06/2000
住所	Residence 126-203, Hashita 2-ban-cho, Toyohashi-shi, Aichi 441-8053 JAPAN		
国籍	Citizenship Japan		
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN		
第四の共同発明者の氏名		Full name of fourth inventor, if any Nobuyasu Morishita	
共同発明者の署名	日付	Fourth inventor's signature <i>Nobuyasu Morishita</i>	Date 17/06/2000
住所	Residence 32-1-203, Yamada 2-ban-cho, Toyohashi-shi, Aichi 441-8104 JAPAN		
国籍	Citizenship Japan		
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN		
第五の共同発明者の氏名		Full name of fifth inventor, if any Noriyuki Fujioka	
共同発明者の署名	日付	Fifth inventor's signature <i>Noriyuki Fujioka</i>	Date 15/06/2000
住所	Residence 1008-1, Okazaki, Kosai-shi, Shizuoka 431-0452 JAPAN		
国籍	Citizenship Japan		
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN		
第六の共同発明者の氏名		Full name of sixth inventor, if any Munehisa Ikoma	
共同発明者の署名	日付	Sixth inventor's signature <i>Munehisa Ikoma</i>	Date 15/06/2000
住所	Residence 1-8-17-506, Maeda-cho, Toyohashi-shi, Aichi 440-0814 JAPAN		
国籍	Citizenship Japan		
郵便の宛先	Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN		

(それ以降の共同発明者にたいしても同様な情報
および署名を提供すること。)

(Supply similar information and signature for subsequent joint
inventors.)

Japanese Language Utility or Design Patent Application Declaration

第七の共同発明者の氏名		Full name of seventh inventor, if any	
共同発明者の署名	日付	Yoshiaki Ogata	
		Seventh Inventor's signature	Date
住所		Yoshiaki Ogata	13/06/2000
国籍		Residence 1-14-6-3-201, Minamiushikawa, Toyohashi-shi, Aichi 440-0014 JAPAN	
郵便の宛先		Citizenship Japan	
		Post Office Address c/o PANASONIC EV ENERGY CO., LTD. 555, Sakaijyuku, Kosai-shi, Shizuoka 431-0452 JAPAN	
第八の共同発明者の氏名		Full name of eighth inventor, if any	
共同発明者の署名	日付	Eighth Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	
第九の共同発明者の氏名		Full name of ninth inventor, if any	
共同発明者の署名	日付	Ninth Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	
第十の共同発明者の氏名		Full name of tenth inventor, if any	
共同発明者の署名	日付	Tenth Inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	